


Panel temperature probe



4 wires PT100 probe with sensor protected by a 10x30x5 mm anodized aluminium block. MFA Insulated cable (3m 4x0.15 mm²) and double-sided mounting adhesive for the sensor.

Class "B" thermocouple according to CEI 60751 standards. Maximum temperature 200°C

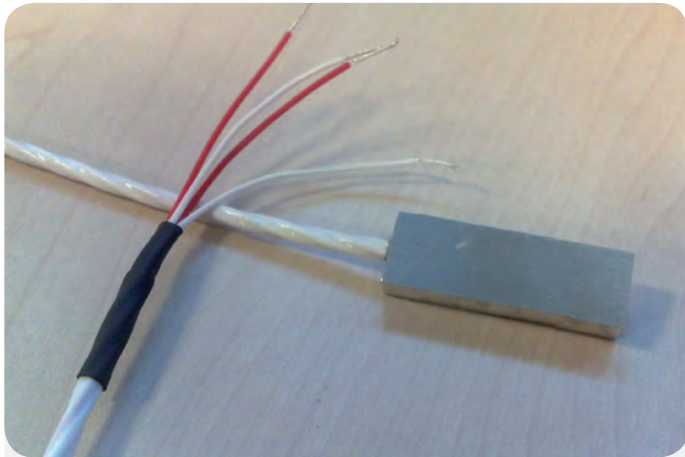