


## TEST REPORT

### EN 62311

Assessment of electronic and electrical equipment related to human exposure restrictions for electromagnetic fields (0 Hz – 300 GHz)

**Report Reference No.** .....: 338753TRFEMF

Tested by  
(name, function and signature) .....: D. Guarnone (project handler) 

Approved by  
(name, function and signature) .....: P. Barbieri (verifier) 

Date of issue .....: 2018-04-09

**Testing Laboratory** .....: **Nemko Spa**

Address .....: Via del Carroccio, 4 – 20853 Biassono (MB) – Italy

Testing location .....: Nemko Spa

Address .....: Via del Carroccio, 4 – 20853 Biassono (MB) – Italy

**Applicant's name** .....: **Energy Team Spa**

Address .....: Via della Repubblica 9 20090 Trezzano Sul Naviglio MI - Italy

#### Test specification:

Standard .....: EN 62311:2008

Full application of the standards ☒

Partial application of the standards ☐

Test procedure .....: Nemko WM L0077, WM L0177 and WM L1002

**Test Report Form No.** .....: 62311TRFEMF

TRF Originator .....: Nemko Spa

Master TRF .....: 2017-10

**Nemko Spa, 20853 Biassono (MB), Italy. All rights reserved.**

This publication may be reproduced in whole for non-commercial purposes as long as Nemko Spa is acknowledged as copyright owner and source of the material. Nemko Spa takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test item description** ..... : Gateway to acquire, store and send data

Trade Mark .....: Energy Team Spa

Manufacturer .....: **Energy Team Spa**

Address of manufacturer .....: Via della Repubblica 9 20090 Trezzano Sul Naviglio MI - Italy

Model .....: NG-Gateway

Ratings .....: 10 W / 48-120 VDC / 100-240 VAC 50-60 Hz

*This test report may not be partially reproduced, except with the prior written permission of Nemko Spa*

*The test report merely corresponds to the tested sample.*

*The phase of sampling / collection of equipment under test is carried out by the customer.*

<b>Test Report No. :</b>	<b>350845TRFEMF</b>	<b>2018-04-09</b>
		Date of issue

Short description of the EuT	Copy of marking plate
Gateway to acquire, store and send data Embedded module Quectel M95 and module WiFi Mod. GWF-3M08 Freq. 2400-2483,5 MHz	
Number of tested samples:	1
Serial number:	511425633
Assigned band:	GSM/GPRS/EDGE: 900/1800MHz, 2.4 GHz to 2.4835 GHz
Accessories and detachable parts included:	antenna
Other options included:	--
<b>Testing</b>	
Date of receipt of test sample:	2018-01-29
Testing commenced on:	2018-01-29
Testing concluded on:	2018-01-31
<b>Possible test case verdicts:</b>	
test case does not apply to the test object:	N (Not applicable)
test object does meet the requirement:	P (Pass)
test object does not meet the requirement:	F (Fail)
<b>Symbols used in this test report</b>	
<input checked="" type="checkbox"/> The crossed square indicates that the listed condition or equipment is applicable for this report.	
<input type="checkbox"/> The empty square indicates that the listed condition or equipment is not applicable for this report.	
Throughout this report point is used as decimal separator.	
The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.	

<b>Verdict</b> according to the standards listed at page 5:	<b>Pass</b>
---	-------------

PROJECT HISTORY		
Report number	Modification to the report / comments	Date
350845TRFEMF	First release	2018-04-09
--	--	--
--	--	--
--	--	--
REMARKS		

PRODUCT VARIANTS		
Variant model	Difference against the main model	Test performed
--	--	--
--	--	--
--	--	--
--	--	--
REMARKS		

## Contents

<b><u>1</u></b>	<b><u>TEST STANDARDS</u></b>	<b><u>5</u></b>
<b><u>2</u></b>	<b><u>EQUIPMENT UNDER TEST</u></b>	<b><u>6</u></b>
2.3	EUT CONFIGURATION MODES	6
2.4	INPUT/OUTPUT PORTS	7
2.5	EQUIPMENT USED DURING TEST	7
<b><u>3</u></b>	<b><u>TEST ENVIRONMENT</u></b>	<b><u>8</u></b>
3.1	ADDRESS OF THE TEST LABORATORY	8
3.2	ENVIRONMENTAL CONDITIONS	8
3.3	TEST EQUIPMENT USED FOR THE MONITORING OF THE ENVIRONMENTAL CONDITIONS	8
3.4	STATEMENT OF THE MEASUREMENT UNCERTAINTY	8
<b><u>4</u></b>	<b><u>TEST CONDITIONS AND RESULTS</u></b>	<b><u>9</u></b>
4.1	MPE CALCULATION	9
<b><u>5</u></b>	<b><u>EUT PHOTOS</u></b>	<b><u>12</u></b>

## **1 TEST STANDARDS**

The tests were performed according to following standards and procedures.

**NEMKO WM L0177:** General routines for using instruments at Nemko

**NEMKO WM L1002:** Measurement Uncertainty - Policy and Statement

**NEMKO WM L0077:** General routines to perform EMC tests

**[1] Council Recommendation 1999/519/EC** of 12 July 1999 on the limitation of exposure of the general public to electromagnetic fields (0 Hz to 300 GHz)

**[2] EN 62311:2008**

Assessment of electronic and electrical equipment related to human exposure restrictions for electromagnetic fields (0 Hz – 300 GHz)

The main standard above contain references to other standards, which are listed below.

**[3] EN 50383:2010**

Basic standard for the calculation and measurement of electromagnetic field strength and SAR related to human exposure from radio base stations and fixed terminal stations for wireless telecommunication systems (110 MHz - 40 GHz)"

## 2 EQUIPMENT UNDER TEST

### 2.1 Power supply system utilised

Battery voltage:	<input type="checkbox"/>	12 VDC (13.5 VDC)	<input checked="" type="checkbox"/>	230 Vac, 50 Hz
------------------	--------------------------	-------------------	-------------------------------------	----------------


### 2.2 EuT operation modes

Mode	Description
1	Monitoring on display camera data and CANBUS data on PC

### 2.3 EuT configuration modes

Emission: the EuT was configured to measure its highest possible radiation level. The test modes selected are according to EuT instruction manual.

Immunity: the EuT was configured to have its highest possible susceptibility against tested phenomena. The test modes selected are according to EuT instruction manual.

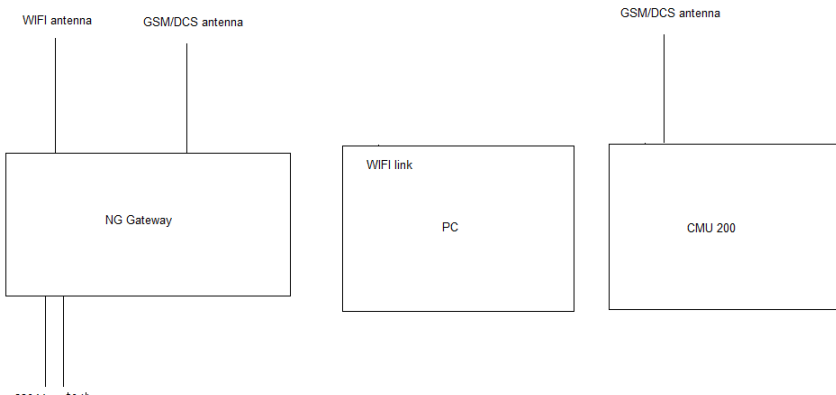Mode	Description
1	<p>E.U.T. has been connected as in the following figure:</p>  <pre> graph TD     NG[NG Gateway] --- WiFiAnt[WIFI antenna]     NG --- GSMDCSAnt1[GSM/DCS antenna]     NG --- WiFiLink[WIFI link] --- PC[PC]     GSMDCSAnt2[GSM/DCS antenna] --- CMU[CMU 200] </pre>

## 2.4 Input/Output Ports

Port	Name	Type*	Cable Shielded	Description
0	Enclosure	N/E	—	—
1	Power input	AC/DC	<input type="checkbox"/>	Two wires
2	Power output	AC/DC	<input type="checkbox"/>	Two wires
3	RS485	I/O	<input type="checkbox"/>	Three wires
3	RS485	I/O	<input type="checkbox"/>	Three wires
2	Ethernet	TP	<input type="checkbox"/>	Standard
2	USB	I/O	<input type="checkbox"/>	Standard
5	GSM/GPRS	ANT	<input type="checkbox"/>	Sma cable
7	WIFI	ANT	<input type="checkbox"/>	Sma cable
*Note: AC = AC Power Port                      DC = DC Power Port                      N/E = Non-Electrical I/O = Signal/Control Input or Output Port    TP = Telecommunication Port                      ANT = Antenna Port				

## 2.5 Equipment Used During Test

Use*	Product Type	Manufacturer	Model	Comments
AE	PC	--	--	
Note: * Use EUT - Equipment Under Test AE - Auxiliary/Associated Equipment (Not Subjected to Test) SIM - Simulator (Not Subjected to Test)				

### 3 TEST ENVIRONMENT

#### 3.1 Address of the test laboratory

Nemko Spa  
Via del Carroccio, 4  
20853 Biassono (MB) – Italy

Tests site/benches are in accordance with applicable standard/s, and have been utilized by Nemko Spa testing engineer(s).

#### 3.2 Environmental conditions

Unless different values are declared in the test case, following ambient conditions apply for the tests:

Ambient temperature:	<u>18÷33 °C</u>
Relative Humidity:	<u>30÷60 %</u>
Atmospheric pressure:	<u>980÷1060 hPa</u>

#### 3.3 Test equipment used for the monitoring of the environmental conditions

Equipment	Manufacturer	Model	Serial N°
Thermohygrometer data loggers	Testo	175-H2	20012380/305
Thermohygrometer data loggers	Testo	175-H2	38203337/703
Barometer	MSR	MSR145B	330080

#### 3.4 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to CISPR 16-4-2 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4-2: Uncertainties, statistics and limit modelling – Uncertainty in EMC measurements" and is documented in the Nemko Spa Technical Procedure WML1002. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device. Hereafter the best measurement capability for Nemko Spa laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Induced current	20 kHz ÷ 10 MHz	26 %	(1)

#### NOTES:

- (1) The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k = 2$  which has been derived from the assumed normal probability distribution with infinite degrees of freedom and for a coverage probability of 95 %.



## 4 TEST CONDITIONS AND RESULTS

### 4.1 MPE calculation

#### 4.1.1 Test limits

The device shall comply with the relevant limits for general public exposure specified in [1] as basic restrictions or reference levels:

Frequency range	E-field strength (V/m)	H-field strength (A/m)	B-field (μT)	Equivalent plane wave power density $S_{eq}$ (W/m <sup>2</sup> )
0-1 Hz	—	$3,2 \times 10^4$	$4 \times 10^4$	—
1-8 Hz	10 000	$3,2 \times 10^4/f^2$	$4 \times 10^4/f^2$	—
8-25 Hz	10 000	$4\,000/f$	$5\,000/f$	—
0,025-0,8 kHz	$250/f$	$4/f$	$5/f$	—
0,8-3 kHz	$250/f$	5	6,25	—
3-150 kHz	87	5	6,25	—
0,15-1 MHz	87	$0,73/f$	$0,92/f$	—
1-10 MHz	$87/f^{1/2}$	$0,73/f$	$0,92/f$	—
10-400 MHz	28	0,073	0,092	2
400-2 000 MHz	$1,375\ f^{1/2}$	$0,0037\ f^{1/2}$	$0,0046\ f^{1/2}$	$f/200$
2-300 GHz	61	0,16	0,20	10

Table 1 - Reference levels for electric, magnetic and electromagnetic fields (0 Hz to 300 GHz, unperturbed rms values)

#### 4.1.2 Calculation method

The power flux density at a distance  $r$  from a transmitting antenna in a far-field region is calculated applying the following formula ([3], § 8.3.2):

$$S = \frac{PG}{4\pi r^2}$$

- S = power flux density at the distance  $r$ , in watts per square meter (W/m<sup>2</sup>)
- P = input power of the antenna, in watts (W)
- G = antenna gain (numeric) relative to an isotropic antenna
- $r$  = distance from the antenna to the point of investigation, in meters (m)

To calculate the shorter distance to meet the limit of Table 1, the above formula can be rewritten as follow:

$$r = \sqrt{\frac{PG}{4\pi S}}$$

### 4.1.3 Evaluation

Power density evaluated at a distance of 20 cm (0.2 m):

(for the max measured EIRP value see test report no 350845-1TRFWL, 350845-2TRFWL and issued by Nemko S.p.A. the 2018-01-31).

Radio module	Max measured $P_{EIRP}$ (dBm)	Max measured EIRP (W)	Distance (m)	Power density ( $W/m^2$ )	MPE limit <sup>1</sup> ( $W/m^2$ )	Verdict
		$= 10^{\frac{P_{EIRP}}{10}} \cdot 10^{-3}$		$= \frac{P_E}{4\pi r^2}$	10-400 MHz → 2 $W/m^2$ 400-2000 MHz → $\frac{P}{100}$ $W/m^2$ 2-300 GHz → 10 $W/m^2$	
GSM	32.45	1.76	0.2	3.5	4.5	P
WIFI 2.4 GHz	13	0.02	0.2	0.04	10	P

(1) MPE = Maximum Permissible Exposure

For simultaneous transmission, the following equation must be satisfied:

$$\frac{S_1}{L_1} + \frac{S_2}{L_2} + \frac{S_3}{L_3} < 1$$

Where:

$S_i$  = power density calculated above

$L_i$  = limit for the power density

SIMULTANEOUS TRANSMISSION			
Radio module	Frequency band	Power density (Si)	Power density limit (Li)
GSM	900 MHz	0.778	4.5
WIFI 2.4 GHz	2400 MHz to 2483.5 MHz	0.004	10
SUM	0.782		
SUM < 1 verified, then <b>PASS</b>			
REMARK:			

#### **4.1.4 Result**


The highest power density estimated at distance of 20 cm (0.2 m) from the transmitting antenna is  $3.5 \text{ W/m}^2$ . The Recommendation [1] fixes the limit to  $4.5 \text{ W/m}^2$ ; therefore the device demonstrate own conformity at that distance. In addition, it should be take in duly consideration that the above limits are for continuous operating; so the present evaluation is to be considered adequately conservative. Installation instruction shall be report a notice to final users so that a minimal distance of 0.2 m from the radiator (antenna) is maintained in every direction. The limit of the Recommendation [1] is also satisfied with a simultaneous transmission of four radio modules set in the worst configuration.

## 5 EUT PHOTOS







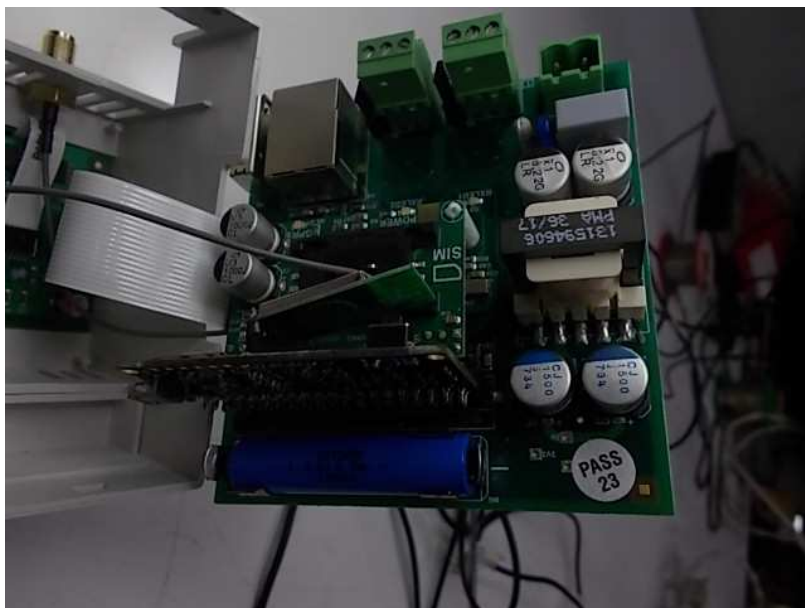

End of report